

# VENTO™ Hygienic continuous cartoner



INFEED



CARTONING



CASE PACKING



PALLETIZING

## TECHNICAL SPECIFICATIONS

- Motion Continuous
- Dimensions H = 70.90" / 1800 mm  
L = 278.30" / 7070 mm  
D = 69.30" / 1760 mm
- Electrical 230V - 575V/3PH, 50/60Hz
- Safety system Category 3 EN-13849-1 PLd (control reliable)
- Air consumption 0.4 m<sup>3</sup> /min @ 5-6 bar  
12-15 cfm @ 70-83 psi
- Weight App. 4,410 lbs / 2.000 kg


The Molins Langen VENTO™ Hygienic series provides a unique combination of speed, footprint and flexibility in combination with unique hygienic features.



## OUTPUT



- Speed Max. 500 cartons per min.
- Dimensions Min H = 0.8" / 20 mm  
L = 2.0" / 50 mm  
D = 3.3" / 85 mm
- Dimensions Max H = 4.33" / 110 mm  
L = 7.48" / 190 mm  
D = 10.24" / 260 mm

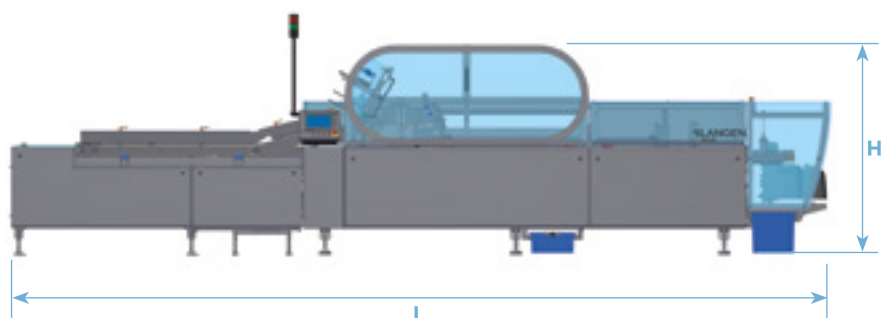


## STANDARD FEATURES

- Hygienic design (reduced flat surfaces, reduced hollow bodies, easy cleaning, etc.) makes it extremely suitable for food environment
- Touch screen HMI controls
- 2-head rotary feeder with pre break for optimal carton forming
- Pre-sized carton magazine for quick change overs
- No product - no carton feature
- Molins Langen carton carrying system - maximum carton quality
- Low level magazine



## OPTIONAL FEATURES

- 5-head rotary feeder for maximum speed
- Variety of infeed systems (robotic, bomb-bay, smart belt, etc.)
- Automatic carton loader
- Tuck-in flap closure
- Overhead compression unit (confiner)
- Hose down version

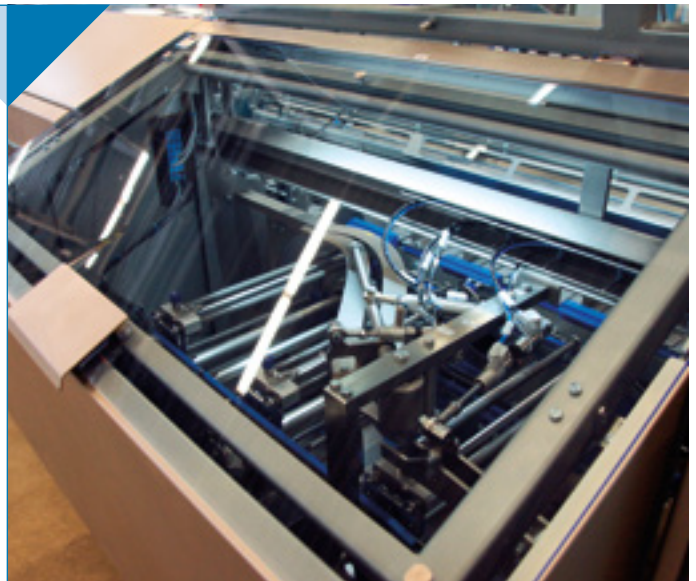

*All information given in this document is dependent upon final machine specification, infeed arrangement, product type and bag specification.*

